

OceanAire
OWC1811

FAMILY FEATURES

- Solid state electronic controller
- Automatic 6-speed fan control with manual override
- Large LED display
- Swivel ball bearing casters with locks at front
- Internal condensate pump with overflow alert
- LCDI power cord
- High pressure safety switch

PERFORMANCE

Ambient Operating Range	65-105°F
Cooling Capacity	1.5 Ton 18,000 btu/h
Supply Airflow cfm	600
Max Supply/Cold Duct Length	25'
Sound Level High (w/out duct)	57 dB

APPLICATION

Voltage @ 60Hz	115 1Phase
Recommended Breaker Size (A)	15
Amps (A)	11.3
Min/Max Voltage	105-125
Power Cord Gauge	14AWG-3Core
Power Cord Length	10 Feet
Plug Receptacle Requirement	NEMA 5-15P



**SHIPPING/LOGISTICS/
 HANDLING/QUALITY**

	Shipping	Out of Carton
Weight (lbs.)	175	155
Height (in.)	46	34.5 (w/casters 39.75)
Width (in.)	27	24.25
Depth (in.)	16	13

RoHS Restriction of Hazardous Substances Standard compliant
 UL 60335 and UL 60335-2-40 compliant

A Carrier Company



spot-coolers.com
 800-367-8675

©2023 Carrier. All Rights Reserved.

OceanAire

OPTIONAL ACCESSORIES



Hose Kits:

Designed for use with OceanAire Portable Water-Cooled air conditioners, the hose kits consist of three hoses:

Water-In (3/8) black hose made of reinforced PVC tubing

Water-Out (3/8) red hose made of reinforced PVC tubing

Drain (3/8) yellow hose made of gray reinforced PVC tubing


Hose Kit / 10 Foot
Part Number: Hk-1

Hose Kit / 25 Foot
Part Number: Hk-2

Hose Kit / 40 Foot
Part Number: Hk-5



Nozzle Kit / 2 x 6"
For directional cooling
Part Number: 2NK-2

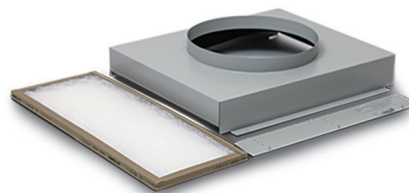

Evaporator Return Air Plenum
For ducting return air
Part Number: 2DEP-12



Discharge Duct Adaptor
For extended duct length
Part Number: 2DDA-10