

OceanAire OWC6012

FAMILY FEATURES

- Solid state electronic controller
- Automatic 6-speed fan control with manual override
- Large LED display
- Swivel ball bearing casters with locks at front
- Internal condensate pump with overflow alert
- LCDI power cord
- High pressure safety switch

PERFORMANCE

Ambient Operating Range	65-105°F
Cooling Capacity	5 Ton 60,100 btu/h
Supply Airflow cfm	1,950
Max Supply/Cold Duct Length	80'
Sound Level High (w/out duct)	69 dB

APPLICATION

Voltage @ 60Hz	208-230 1Phase
Recommended Breaker Size (A)	30
Amps (A)	23.7
Min/Max Voltage	187-253
Power Cord Gauge	10AWG-3Core
Power Cord Length	10 Feet
Plug Receptacle Requirement	NEMA 6-30P

SHIPPING/LOGISTICS/ HANDLING/QUALITY

	Shipping	Out of Carton
Weight (lbs.)	430	375
Height (in.)	61	45.25 (w/casters 51.50)
Width (in.)	30	27
Depth (in.)	31	29 (w/2in kick plate)

RoHS Restriction of Hazardous Substances Standard compliant
UL 60335 and UL 60335-2-40 compliant

A Carrier Company



[spot-coolers.com](https://www.spot-coolers.com)
800-367-8675

©2023 Carrier. All Rights Reserved.

OceanAire

OPTIONAL ACCESSORIES



Hose Kits:

Designed for use with OceanAire Portable Water-Cooled air conditioners, the hose kits consist of three hoses:

Water-In (5/8) black hose made of reinforced PVC tubing

Water-Out (5/8) red hose made of reinforced PVC tubing

Drain (3/8) yellow hose made of gray reinforced PVC tubing


Hose Kit / 10 Foot
Part Number: Hk-3

Hose Kit / 25 Foot
Part Number: Hk-4

Hose Kit / 40 Foot
Part Number: Hk-6



Nozzle Kit / 2 x 6"
For directional cooling
Part Number: 2NK-3

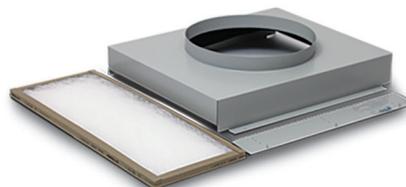

Evaporator Return Air Plenum
For ducting return air
Part Number: DEP-16



Discharge Duct Adaptor
For extended duct length
Part Number: 2DDA-16