

# OceanAire OWC6012

## FAMILY FEATURES

- Solid state electronic controller
- Automatic 6-speed fan control with manual override
- Large LED display
- Swivel ball bearing casters with locks at front
- Internal condensate pump with overflow alert
- LCDI power cord
- High pressure safety switch

## PERFORMANCE

Ambient Operating Range	<b>65-105°F</b>
Cooling Capacity	<b>5 Ton 60,100 btu/h</b>
Supply Airflow cfm	<b>1,950</b>
Max Supply/Cold Duct Length	<b>80'</b>
Sound Level High (w/out duct)	<b>69 dB</b>

## APPLICATION

Voltage @ 60Hz	<b>208-230 1Phase</b>
Recommended Breaker Size (A)	<b>30</b>
Amps (A)	<b>23.7</b>
Min/Max Voltage	<b>187-253</b>
Power Cord Gauge	<b>10AWG-3Core</b>
Power Cord Length	<b>10 Feet</b>
Plug Receptacle Requirement	<b>NEMA 6-30P</b>

## SHIPPING/LOGISTICS/ HANDLING/QUALITY

	Shipping	Out of Carton
Weight (lbs.)	430	375
Height (in.)	61	45.25 (w/casters 51.50)
Width (in.)	30	27
Depth (in.)	31	29 (w/2in kick plate)

RoHS Restriction of Hazardous Substances Standard compliant  
UL 60335 and UL 60335-2-40 compliant

A Carrier Company



[spot-coolers.com](https://spot-coolers.com)  
800-367-8675

©2023 Carrier. All Rights Reserved.

# OceanAire

## OPTIONAL ACCESSORIES



### Hose Kits:

Designed for use with OceanAire Portable Water-Cooled air conditioners, the hose kits consist of three hoses:

**Water-In** (5/8) black hose made of reinforced PVC tubing

**Water-Out** (5/8) red hose made of reinforced PVC tubing

**Drain** (3/8) yellow hose made of gray reinforced PVC tubing

**Hose Kit / 10 Foot**  
Part Number: Hk-3

---


**Hose Kit / 25 Foot**  
Part Number: Hk-4

---

**Hose Kit / 40 Foot**  
Part Number: Hk-6



**Nozzle Kit / 2 x 6"**  
For directional cooling  
Part Number: 2NK-3

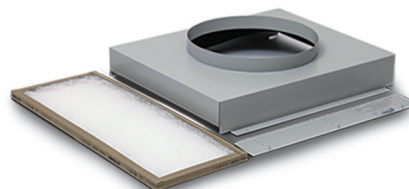

**Evaporator Return Air Plenum**  
For ducting return air  
Part Number: DEP-16



**Discharge Duct Adaptor**  
For extended duct length  
Part Number: 2DDA-16